

ECWP7Q **ThermaLED** technology

ThermaLED Polycarbonate Entry Light



12802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM

REVOLUTION WWW.ECO-REVOLUTION.COM
A QSSI COMPANY SINCE 1985

Order Information Example: ECWP7QF1X11U5KLB

ECWP7Q	F	1X11	U	5K	L	B
Model	Optics	Wattage	Driver	CCT	Lens	Color
ECWP7Q= ThermaLED Polycarbonate Entry Light	F=Type IV	1X11=11w	U=120-277V	5K=5000K	L=SoftLED LumaLens Opal Polycarbonate Outer Conical Lens	B=Black



L70
(25°C) **133,000 Hours**

The Eco-Revolution ECWP7Q general purpose entry light luminaire provides optically controlled wide spread light distribution designed to replace HID lighting systems up to 70w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings, apartment complexes and medical facilities. Mounting heights of 8 to 12 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Die Cast Back Plate with White Powdercoat Finish. Molded Polycarbonate Front Housing. 120-277V Photocell Included.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP65 Sealed LED Compartment.
ADA Compliant

Finish:

Polycarbonate Front Housing in Black with White Powdercoat Finish Back Plate.

Lens:

SoftLED LumaLens Polycarbonate Opal Vandal-Resistant Lens
Eliminates LED Hot Spots

Mounting Options:

Mount Directly Over a 4" Recessed Outlet Box.

ThermaLED LED:

Aluminum Boards

Wattage:

Array: 11w; System: 13.8w; (70w HID Equivalent)

Driver:


Electronic Driver, 120-277V, 50/60Hz, Non-Dimmable

Controls:

Factory-Installed Photocell is Internally Wired for Switching Within the Housing. Fixtures are Tested with Eco-Revolution Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +40°C Environment.

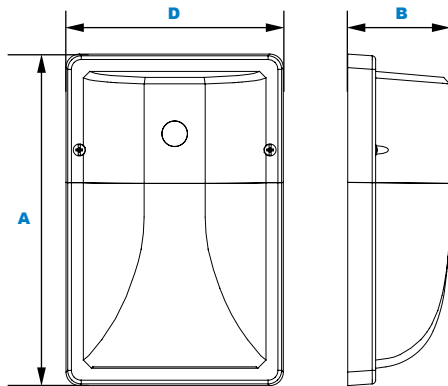

Dimensions

Width (D)	5¼" (136mm)
Depth (B)	2½" (64mm)
Height (A)	8¼" (207mm)

Certification & Listings:



Project Information:

Project Name: _____

Complete Catalog #: _____

Comments: _____

Fixture Type: _____

Date: _____

5 LOCATIONS
Tampa, FL
Vancouver, WA
Cerritos, CA
Walden, NY
Memphis, TN

ECWP7Q **ThermaLED** technology


ThermaLED Polycarbonate Entry Light



12802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM
WWW.ECO-REVOLUTION.COM

REVOLUTION
A QSSI COMPANY SINCE 1985

Photometric Data

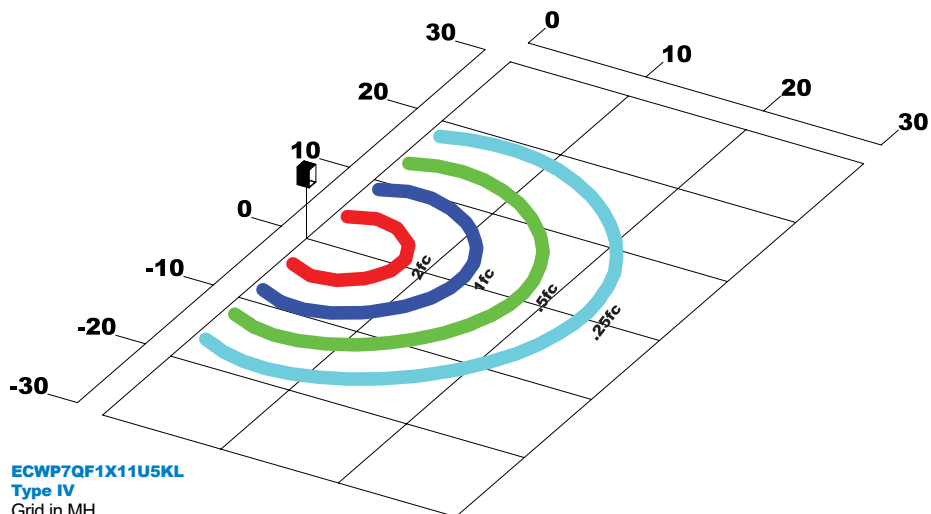

ECWP7QF1X11U5KL
Type IV
Grid in MH
MH=10 Feet

Photometric Performance

5000 CCT 80 CRI

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Lumens	B	U	G
ThermaLED 11w	170	14	Type IV	1490	0	3	2