

ECCP30Q **ThermaLED** Technology

ThermaLED Reveal Small Round Canopy



12802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM

REVOLUTION WWW.ECO-REVOLUTION.COM
A QSSI COMPANY SINCE 1985




L70
(25°C) **473,000 Hours**



The Eco-Revolution ECCP30Q Reveal Architectural Small Round Canopy is available in Type III or V distributions with two lens options designed to replace HID lighting systems up to 250w MH or HPS. Typical area lighting applications include retail centers, industrial parks, schools and universities, public transport and airports, office buildings and medical facilities. Mounting heights of 12 to 20 feet can be used based on light level and uniformity requirements.

Housing:	Die Cast Aluminum Housing, Integral Heat Sinking.
Listing & Ratings:	ETL: Listed for Wet Locations, ANSI/UL 1598, 8750 IP65
Finish:	Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request
Lens:	Clear UV-Stabilized Polycarbonate or SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Array Lens to Seal LED Array
Mounting Options:	Included Easy-Hang Bracket Fits Standard 4" Electrical Box, Allowing One Person Installation.
ThermaLED LED:	Aluminum Boards
Wattage:	37w Array: 37w, System: 39w; (70-150w HID Equivalent) 65w Array: 65.1w, System: 68w; (150-250w HID Equivalent) 84w Array: 84w, System: 86w; (150-250w HID Equivalent)
Driver:	Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.
Controls:	Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with Eco-Revolution Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.
Warranty:	5-Year Warranty for -40°C to +50°C Environment.

Specifications and Features:

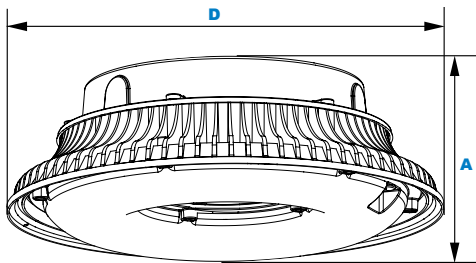

Dimensions

Height (A)	5½" (142mm)
Diameter (D)	16½" (411mm)

See Page 3 for Projected Lumen Maintenance Table.

Certification & Listings:



Project Information:

Project Name: _____

Complete Catalog #: _____

Comments: _____

Fixture Type: _____

Date: _____

5 LOCATIONS
Tampa, FL
Vancouver, WA
Cerritos, CA
Walden, NY
Memphis, TN

ECCP30Q **ThermaLED** Technology

ThermaLED Reveal Small Round Canopy



1 2802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM

REVOLUTION WWW.ECO-REVOLUTION.COM
A QSSI COMPANY SINCE 1985

Order Information Example:

ECCP30QF1X84U5KCBSF

ECCP30Q							
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
ECCP30Q=ThermaLED Reveal Small Round Canopy	C=Type III F=Type V	1X37=37w 1X65=65w 1X84=84w	U=120-277V H=347-480V	3K=3000K* 4K=4000K 5K=5000K *37w & 65w Type III; 37w & 84w Type V	C=Clear UV-Stabilized Polycarbonate Array Lens L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Array Lens* *Type V Models Only	B=Black C=Custom (Consult Factory)	SF=Single Fuse* DF=Double Fuse* SP=Surge Protection S2=Microwave Sensor with Dimming for Mounting Heights of 8' to 40'.* S4=Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19'.* BU=Battery Backup, 90 Minutes (37w & 65w Only)* BUC=Cold Start Battery Backup, -20°C, 90 Minutes (37w & 65w Only)* *120-277V Models Only.

Accessories & Replacement Parts:

Accessories

(Order Separately, Field Installed)

ECAS301S* Spun Aluminum Shade with Powdercoat Finish, Hardware Included

*Specify Color: B=Black, C=Custom (Consult Factory)



ECAS301S*

*Shown Mounted

Replacement Parts

(Order Separately, Field Installed)

ECP17117 Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz

ECP17123 Internally Mounted Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', 120-277VAC, 50/60Hz

For Replacement Battery Backup, see the Eco-Revolution LED Battery Backup Specification Sheet.




ECP17117




ECP17123

Photometric Data

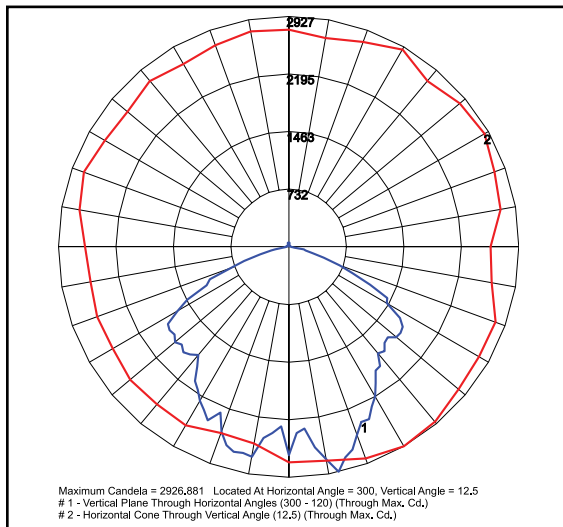

ECCP30QF1X84U5KC -
Clear Prismatic Lens

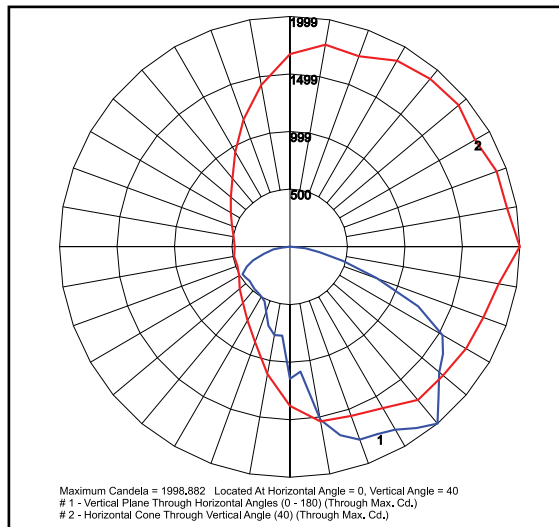

ECCP30QC1X65U5KC -
Clear Prismatic Lens

ECCP30Q **ThermaLED** Technology

ThermaLED Reveal Small Round Canopy



12802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM

REVOLUTION WWW.ECO-REVOLUTION.COM
A QSSI COMPANY SINCE 1985

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Spacing Criteria	5000 CCT 80 CRI		4000 CCT 80 CRI		3000 CCT 80 CRI	
					Lumens	LPW	Lumens	LPW	Lumens	LPW
ThermaLED 37w	525	39	Type III Clear	2.14	3,228	83	3,107	80	2,986	77
ThermaLED 65w		68	Type III Clear	2.14	5,671	83	5,458	80	5,246	77
ThermaLED 84w		86	Type III Clear	2.14	7,067	82	6,802	79	-	-
	Type V Clear		1.24	7,887	92	7,216	84	7,098	83	

Projected Lumen Maintenance

Data shown for 5000 CCT		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 86w	1.00	0.98	0.97	0.94	473,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.97	0.95	0.90	290,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.98	0.95	0.91	220,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.