

ECKH25Q COLORLED

ThermaLED Small Bentley Kitty Hawk Area/Flood/Wall Light



12802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM
WWW.ECO-REVOLUTION.COM


REVOLUTION
A QSSI COMPANY SINCE 1985



L70
(25°C) **429,000 Hours**



Shown with "SF" Slipfitter Option.

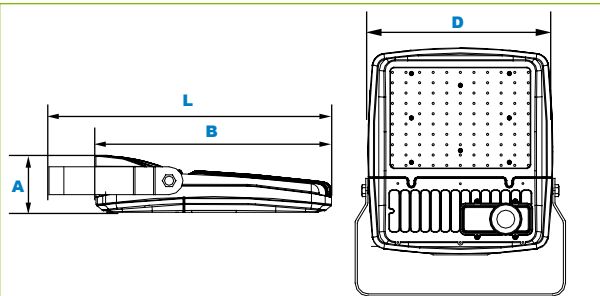

Dimensions

Width (D) 13³/₈" (340mm)

Length (B) 15" (381mm)

Height (A) 3³/₈" (92mm)

Kitty Hawk Arm (KA): 19¹/₄" (491mm)

Slipfitter (SF): 18³/₄" (476mm)

Mounting Arm Adaptor (MA): 19¹/₈" (486mm)

Yoke (Y): 18" (457mm)

Bracket (BR): 18³/₄" (476mm)

Easy-Hang Wall Bracket (EH): 16" (406mm)

Length with Mount (L)

The Eco-Revolution ECKH25Q ColorLED static color cut-off area, wall mounted or flood light luminaire is available with a wide choice of mounting configurations and IES Type III or V distributions or a 30° narrow beam designed to provide accent colored light using Blue, Green, Red or Amber LED arrays. Typical lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting can be accomplished using ground attachment accessories and to heights of 14 to 25 feet based on light level and uniformity requirements.

Housing:

Die Cast Aluminum Housing and Front Frame, Integral Heat Sinking and Driver Compartment. Photocell Adaptable. Nickel-Plated Stainless Steel Hardware.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP66 Sealed LED Compartment.

Finish:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Tempered Clear Flat Glass Lens

Mounting Options:

Mounts with Kitty Hawk Arm, Adjustable Slipfitter, 2³/₈" Diameter Mounting Arm Adapter, Yoke, Two-Piece Bracket or Easy Hang Wall Bracket (Factory Installed).

ColorLED LED:

Aluminum Boards

Wattage:

81w: Array: 81w, System: 81.5w; (150-250w HID Equivalent.)
87w: Array: 87w, System: 98w; (150-250w HID Equivalent.)

Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with Eco-Revolution Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.

Specifications and Features:

Certification & Listings:



Project Information:

Project Name:

Complete Catalog #:

Comments:

Fixture Type:

Date:

5 LOCATIONS
Tampa, FL
Vancouver, WA
Cerritos, CA
Walden, NY
Memphis, TN

ECKH25Q COLORLED

ThermaLED Small Bentley Kitty Hawk Area/Flood/Wall Light



12802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM
WWW.ECO-REVOLUTION.COM

REVOLUTION
A QSSI COMPANY SINCE 1985

Order Information Example:		ECKH25QF1X87UBLCSZSFP							
ECKH25Q		C							
Model	Beam	Wattage	Driver	CCT	Lens	Color	Mounting	Options	
ECKH25Q = ThermaLED Small Bentley Kitty Hawk Area/Flood/Wall Light	C =NEMA 7Hx7V+ F =NEMA 7Hx7V* I =NEMA 4Hx4V* +All Colors Special Order, 6 Weeks Lead Time. *Amber Only In Stock, Others Special Order, 6 Week Lead Time. +Blue, Green, Red In Stock. Amber Special Order, 6 Week Lead Time.	1X81 =81w* *Amber only. 1X87 =87w* +Blue, Green, & Red Only.	U =120-277V H =347-480V	BL =Blue GR =Green RD =Red AM =Amber	C =Standard Clear Flat Glass Lens	Z =Bronze C =Custom (Consult Factory)	KA =Kitty Hawk Arm SF = Slipfitter MA = Mounting Arm Adapter Y =Yoke BR =Two-Piece Swivel Bracket EH =Easy-Hang Wall Bracket NM =No Mount	SF =Single Fuse* DF =Double Fuse* SP =Surge Protection M1 =Motion Sensor, IR for mounting heights of 20ft to 35ft M2 =Motion Sensor, IR for mounting heights of 18ft or less R3 =3-Pin Twist Lock Photocell Receptacle R5 =5-Pin Twist Lock Photocell Receptacle R7 =7-Pin ANSI C136.41—2013 Twist Lock Photocell Receptacle S23 =Internal Microwave Sensor with Dimming for mounting heights of 25' or less* S43 =Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19* *120-277V Models Only	

Mounting Accessories (Order Separately, Field Installed)

 ECKH20RPZ	Die-Cast Adaptor for 3" to 4" Round Poles, Bronze Powdercoat Finish. Use with ECKH25A Kitty Hawk Mounting Arm only.	 ECPTSB290SZ	Twin Pole Tenon Spoke Bracket, 2 3/8" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.	 ECPTSB3120SZ*	Triple Pole Tenon Spoke Bracket, 2 3/8" Horizontal 120° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
 ECKH20WMZ	Die-Cast Wall Mount Adaptor, Bronze Powdercoat Finish. Use with ECKH25A Kitty Hawk Mounting Arm only.	 ECPTSB2180SZ	Twin Pole Tenon Spoke Bracket, 2 3/8" Horizontal 180° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.	 ECPTSB490SZ*	Quad Pole Tenon Spoke Bracket, 2 3/8" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
 ECPTSB1SZ	Single Pole Tenon Spoke Bracket, 2 3/8" Horizontal Mounting Arm, Bronze Powdercoat Finish, Includes Hardware.	 ECPTSB390SZ*	Triple Pole Tenon Spoke Bracket, 2 3/8" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.	*Non-stock item. Consult factory for lead time.	

Accessories & Replacement Parts:

Accessories (Order Separately, Field Installed)	
ECP18131	Twist Lock Non-Shorting (Open) Cap Disconnects Service to Fixture for Temporary or Permanent Disabling (Fixture Always Off). IP65, 480V Maximum.
ECP18132	Twist Lock Shorting Cap Provides Fixed Service to Fixture (Fixture Always on). IP65, Rated Load 7200w Tungsten.
ECP18140	110-120VAC Instant Twist Lock Photocell
ECP18152	277VAC Time Delay Twist Lock Photocell
ECP18156	120-277VAC Universal Twist Lock Photocell
ECP18157	480VAC Time Delay Twist Lock Photocell. For 480V use only.
ECACCHSG1Z	Die Cast Accessory Housing for Installing Sensors or Other Lighting Controls, Bronze Powdercoat Finish
ECKH25GSZ	Aluminum Glare/House Side Shield, Bronze Powdercoat Finish, Includes Hardware.
ECKH25WG	Wire Guard, Stainless Steel Construction, Includes Hardware.
ECACCHSG3	Bronze UV-Stabilized Polycarbonate Housing for Installing Sensors, Includes Sensor Bracket and Gasket.

Replacement Parts (Order Separately, Field Installed)	
ECKH25GL	Tempered Clear Flat Glass Lens.
ECKH25AZ	Kitty Hawk Die-Cast Mounting Arm, Bronze Powdercoat Finish, Includes Hardware. Mounts Directly to Square Poles.
ECALMAAZ	Die-Cast Adaptor for 2 3/8" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
ECKH25YZ	Stamped Heavy-Duty Steel Yoke, Bronze Powdercoat Finish, Includes Hardware.
ECFL73SFZX	External Mount Die-Cast Adjustable Slipfitter for 2 3/8" Tenons, Bronze Powdercoat Finish, Includes Hardware.
ECFL73BRZ	Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.
ECKHEHZ	Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.
ECP17117	Internal Microwave Sensor with Dimming, 120-277VAC, 50/60Hz. See ECP17117 Specification Page for Details.
ECP17123	Internally Mounted Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', 120-277VAC, 50/60Hz



ECKH25Q COLORLED

ThermaLED Small Bentley Kitty Hawk Area/Flood/Wall Light



REVOLUTION
A QSSI COMPANY SINCE 1985

12802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM
WWW.ECO-REVOLUTION.COM

Mounting Options:



ECKH25Q w/ Kitty Hawk Arm (KA)

Kitty Hawk Die-Cast Mounting Arm, Bronze Powdercoat Finish, Includes Hardware. Mounts Directly to Square Poles.



ECKH25Q w/ Pole Mounting Arm Adaptor (MA)

Die-Cast Adaptor for 2 1/2" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.



ECKH25Q w/ Yoke (Y)

Stamped Heavy-Duty Steel Yoke, Bronze Powdercoat Finish, Includes Hardware.



ECKH25Q w/ "SF" External Mount Slipfitter (SF)

External Mount Die-Cast Adjustable Slipfitter for 2 1/2" Tenons, Bronze Powdercoat Finish, Includes Hardware.



ECKH25Q w/ Two-Piece Swivel Bracket (BR)


Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.







ECKH25Q w/ Easy-Hang Bracket (EH)


Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.

Effective Projected Area (EPA)

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 1	0.60	15 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 2@180° Mount	1.20	30 Lbs
 2@90° Mount	0.82	30 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 3@90° Mount	1.32	45 Lbs
 3@120° Mount	1.20	45 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 4@90° Mount	1.32	60 Lbs

Shown with Small Kitty Hawk Arm mounting.

ECKH25Q COLORLED

ThermaLED Small Bentley Kitty Hawk
Area/Flood/Wall Light




12802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM

REVOLUTION WWW.ECO-REVOLUTION.COM
A QSSI COMPANY SINCE 1985



F Optic, 110°H x 110°V, NEMA 7Hx7V

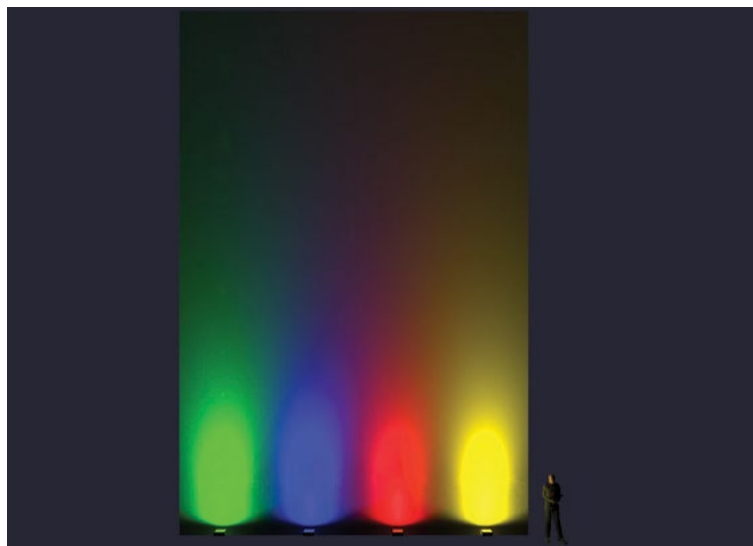

I Optic, 30°H x 30°V, NEMA 4Hx4V

Shown on 48' tall building.

Distributions

LED Board Watts	Input Watts	Beam
AmberLED 81w	82	C 120°H x 70°V, NEMA 7Hx7V
		F 120°H x 120°V, NEMA 7Hx7V
		I 30°H x 30°V, NEMA 4Hx4V
ColorLED 87w Blue, Green, Red	99	C 120°H x 70°V, NEMA 7Hx7V
		F 110°H x 110°V, NEMA 7Hx7V
		I 30°H x 30°V, NEMA 4Hx4V