

NEZXS



NEMA4X/NSF Exit Sign



12802 COMMODITY PL
TAMPA, FL 33626
PHONE: 844-636-2036
SALES@ECO-REVOLUTION.COM

REVOLUTION
A QSSI COMPANY SINCE 1985


WWW.ECO-REVOLUTION.COM

| Order Information Example: | | NEZXS1RBEM-SDT | | | | |
|----------------------------|--------------------------------|------------------|--------------------|------------------------------------|---|--|
| NEZXS | | | | | | |
| Model | No. of Faces | Letter Color | Housing Color | Battery | Options | |
| NEZXS=NEMA4X/NSF Exit Sign | 1=Single Face 2=Double Face | R=Red G=Green | W=White B=Black | (blank)=AC Only EM=NiCd Battery | SDT=Self-Diagnostics ¹ 2C-120=Dual Circuit With 120V Input ² 2C-277=Dual Circuit With 277V Input ² TP=Tamper Proof Screws | |

NOTES: 1. Available only with EM units. 2. Available only with AC units.



Dimensions

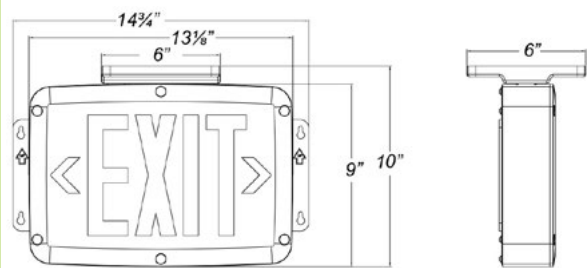

Specifications and Features:

| | |
|-------------------------------|--|
| Housing: | Housing is reinforced polycarbonate construction in white or black finish. Corrosion-resistant enclosure with one piece, high impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws. Knockout's provided for conduit feed applications. EZ snap-out Chevron directional indicators. |
| Listing & Ratings: | Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes. IP66 rated for Ingress protection. NEMA4X and NSF rated. Certified to CEC under Title 20 Regulations. UL certified for use in food service operations. UL listed for wet locations (-20°C – 50°C). |
| Mounting: | Universal knockout pattern on back provided with gasket for watertight seal for back mount. Polycarbonate mounting canopy included for top or end mount. |
| Illumination: | Ultra bright, energy efficient, long life Red or Green LEDs. |
| Electrical: | Dual 120/277 voltage. Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery). Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing. 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only). Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours. |
| Warranty: | Five year warranty on all electronics and housing. Battery pro-rated for five years. |

Certification & Listings:



Project Information:

Project Name: _____ Fixture Type: _____

Complete Catalog #: _____ Date: _____

Comments: _____

5 LOCATIONS
Tampa, FL
Vancouver, WA
Cerritos, CA
Walden, NY
Memphis, TN