



Parking Garage Solutions

ThermoLED Aeroform Garage Lighter, ECAFRC30

ECAFRC30 Ordering Guide

Fixture:

Die Cast and Sand Cast Aluminum Housing, Integral Heat Sinking. Includes 3' Cord.

Wattage:

37w Array: 37w, System: 41w; (70-150w HID Equivalent)
 65w Array: 65.3w, System: 72w; (150-250w HID Equivalent)
 100w Array: 100w, System: 111w; (150-250w HID Equivalent)

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP65 (IP66 with Pendant and Trunnion Mounts Only)

Controls & Options:

Motion Sensors, Surge Protection, Fuses, Battery Backup

Mounting Options



Easy Hang Mount

Trunnion



Pendant



327,000 Hours

NM Mount T & PA Mounts



MODEL

ECAFRC30 ThermoLED Aeroform Garage Lighter

OPTICS	WATTAGES	DRIVER	CCT	COLOR	MOUNTING	OPTIONS
<ul style="list-style-type: none"> •Rectangular Wide (L) •Type V (F) 	<ul style="list-style-type: none"> •1x37w •1x65w •1x100w (100w Type V only) 	<ul style="list-style-type: none"> •120-277v (U) •347-480v (H) 	<ul style="list-style-type: none"> •4000K (4K) •5000K (5K) 	<ul style="list-style-type: none"> •Bronze (Z) •White (W) •Custom Color (Consult Factory) 	<ul style="list-style-type: none"> •Easy-Hang Bracket (NM) •Trunnion (T) •Pendant Mount (PA) 	<p>See Specification Page for Options.</p>

Parking Garage Solutions

ThermaLED Aeroform Garage Lighter, ECAFRC30

ECAFRC30C




Highly Uniform Performance Optics


TYPICAL GARAGE LAYOUT

30ft X 60ft Bay; 9ft Mounting Height

PLAN VIEW

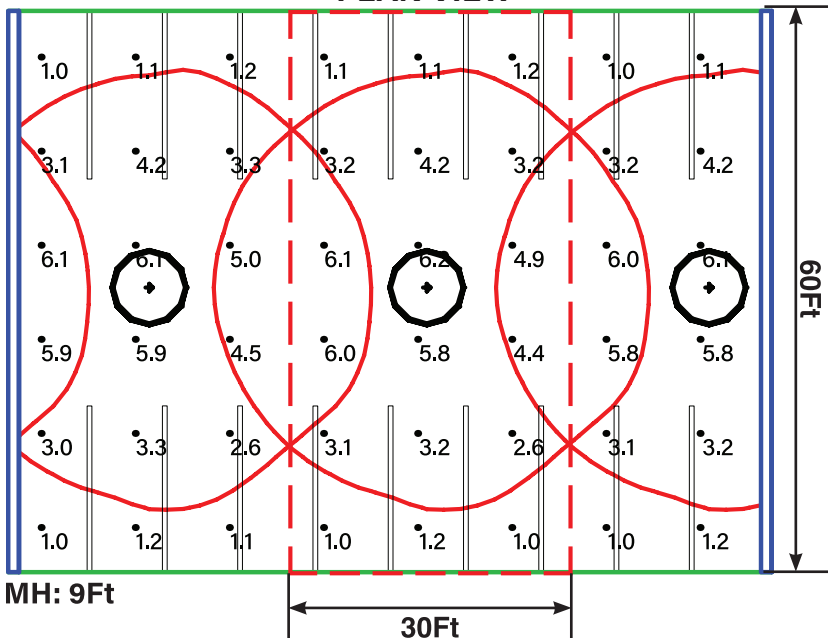


POLAR GRAPH

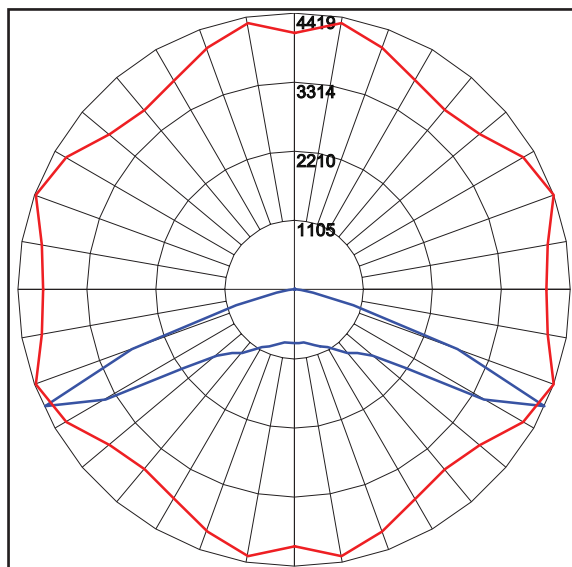

- Controlled full cutoff optics designed specifically for Parking Garages spread light uniformly
- Peak Candlepower is at 25 degrees to driving lane to lower glare

RENDERED VIEW

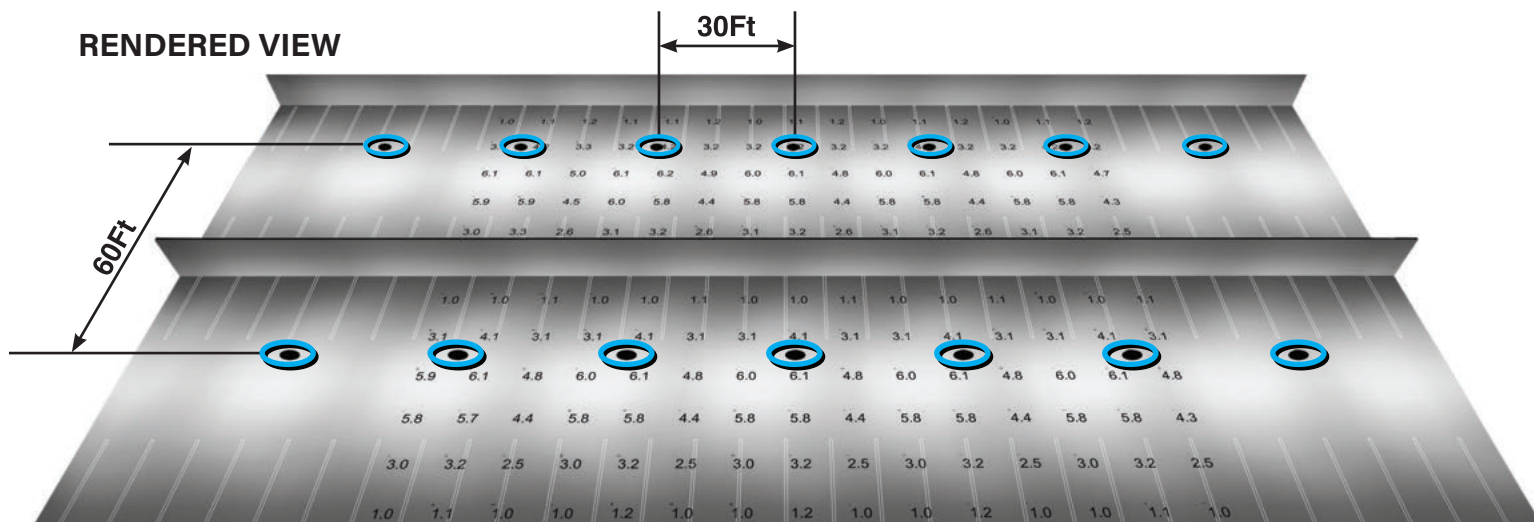

ECAFRC30QL1X37 3.0 FTC AVG, 6.2 FTC MAX, 1.0 FTC MIN, 3.2:1 AVG/MIN, 6.2:1 MAX/MIN

Exceeds IES RP-20-98 of 1.0 FTC MIN and MAX/MIN of 10:1



REVOLUTION
A QSSI COMPANY SINCE 1985

Rev. 072120