



ThermaLED Holly Ridge Post Top Lantern


Historic Series, ECHR20

The Holly Ridge LED Post Top Lantern combines aesthetics and installer-friendly features for roadway, area, and walkway lighting projects. The IP66 sealed LED light engine offers excellent optical control and heat dissipation for long life. Open frame full cutoff optics control glare and optional opal LumaLens provides soft illumination for adjacent building façade and landscape elements. The classic traditional Colonial styled lantern provides delivered lumens exceeding typical 150W HPS fixtures. Holly Ridge is perfect for multi-family residential projects, residential and Town Center streets, and historical themed commercial projects.


Features and Benefits:

- Diecast aluminum lantern 16" square x 16.75" H, 24.25" overall height
- Lensed models include one-piece polycarbonate clear or opal LumaLens options
- Open frame has zero uplight to minimize light pollution and protect the night skies
- 30-80 Array watts – 4,800 to 11,500 delivered lumens, 3K, 4K, 5K CCT
- LED array is mounted in an IP66 sealed rotatable Light Engine with integral diecast aluminum heat sink
- Light Engine includes Integral Optics polycarbonate lens, IES Types I, II, III, IV and V
- IP67 fully potted 120-277VAC or 347-480VAC driver
- Diecast aluminum slip fitter for 3" x 3" tenon
- Twist-lock photocell, fusing, surge protection and battery backup available.

Pendant Mount

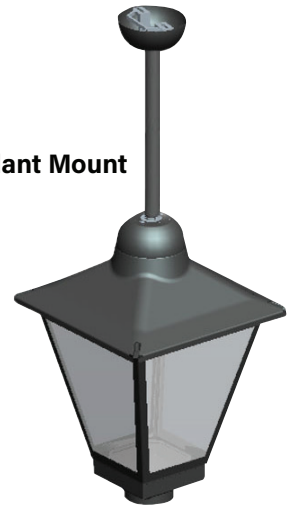

Wall Mount

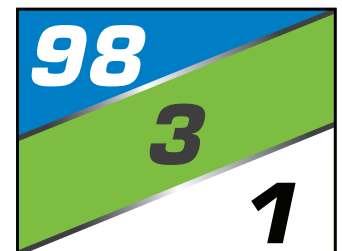

98% Fill Rate
3 day Lead Time
1 piece minimum order



Rev. 021121